





**BUTTERFLY  
SERIES<sup>®</sup>**

# 5V-1A



## 5V-1A MAIN BOARD

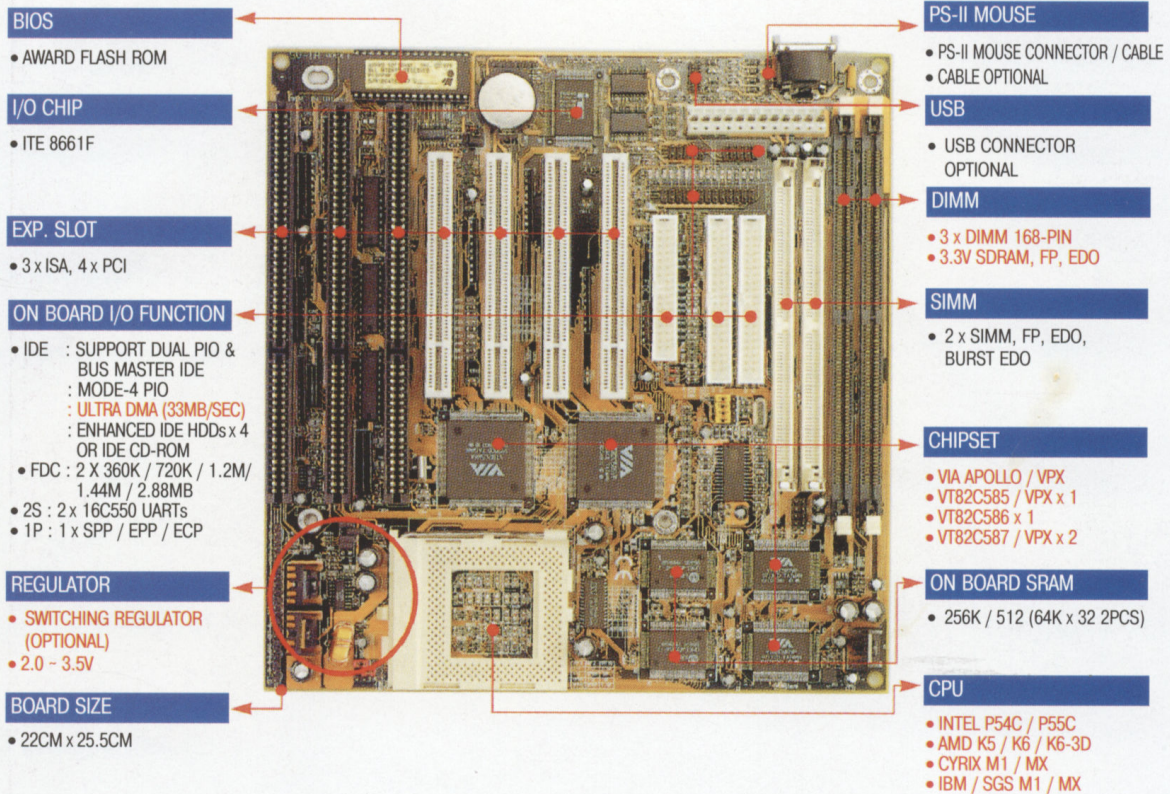

WIN WITH ITE



CHIP AWAY VIRUS  
**PC-cillin**



# 5I-TX2B

5V-1A MAIN BOARD / 5I-TX2B MAIN BOARD

## 5I-TX2B MAIN BOARD

### INFRA-RED

- IRDA (HPSIR) & AMPLITUDE SHIFT IR (ASKIR)
- IR/COM2 SELECTABLE
- OPTIONAL FUNCTION

### BIOS

- AWARD FLASH ROM
- 1MB / 2MB

### I/O CHIP

- ITE 8679F + 8687R

### EXP. SLOT

- 3 x ISA & 4 x PCI

### ON BOARD I/O FUNCTION


- IDE : SUPPORT DUAL PIO & BUS MASTER IDE
- MODE-4 PIO
- **ULTRA DMA (33MB/SEC)**
- ENHANCED IDE HDDs x 4
- OR IDE CD-ROM
- FDC : 2 X 360K / 720K / 1.2M / 1.44M / 2.88MB
- 2S : 2 x 16C550 UARTS
- 1P : 1 x SPP / EPP / ECP

### REGULATOR

- SWITCHING POWER REGULATOR
- 2.0 - 3.5V

### BOARD SIZE

- 22CM x 23CM

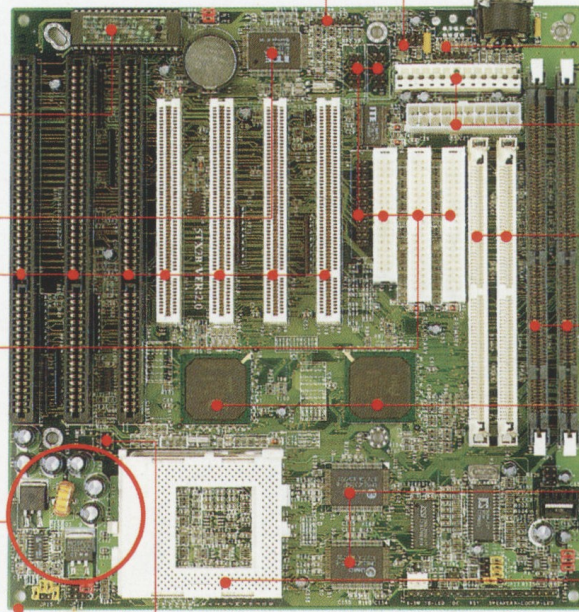

※CREATIVE "SB-LINK" SUPPORTED

### USB

- USB CONNECTOR OPTIONAL

### PS-II MOUSE

- PS-II MOUSE CONNECTOR / CABEL
- CABLE OPTIONAL

### POWER CONNECTOR

- AT / ATX DUAL POWER CONNECTORS
- ATX OPTIONAL

### SIMM

- 2 x SIMM, FP, EDO, BURST EDO

### DIMM

- 2 x DIMM 168-PIN
- 3.3V SDRAM, FP, EDO

### CHIPSET


- INTEL 82439TX x 1 (BGA)
- INTEL 82371TX x 1 (BGA)

### S-RAM

- 265K / 512K CACHE

### CPU

- INTEL P54C / P55C
- AMD K5 / K6 / K6-3D
- CYRIX M1 / MX
- IBM / SGS M1 / MX
- OVER HEAT ALARM OPTIONAL
- CPU SPEED CONTROL OPTIONAL



WIN WITH ITE



# 5MVP3



## 5MVP3 AGP MAIN BOARD (100MHz)

### USB

- USB CONNECTOR OPTIONAL

### BIOS

- AWARD FLASH ROM

### I/O CHIP

- ITE 8661F

### INFRA-RED

- IRDA (HPSIR) & AMPLITUDE SHIFT IR (ASKIR)
- IR/COM2 SELECTABLE
- OPTIONAL FUNCTION

### EXP. SLOTS

- 3 x ISA & 3 x PCII
- AGP x 1

### CHIPSET


- VIA APOLLO MVP3 (100MHz)
- VT82C597 x 1
- VT82C586 x 1

### REGULATOR

- SWITCHING REGULATOR (OPTIONAL)
- 2.0 - 3.5V

### BOARD SIZE

- 22CM x 25CM

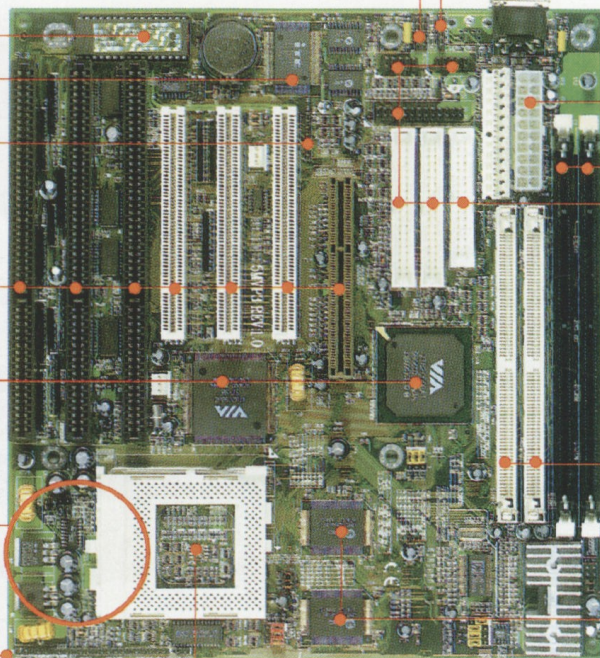

### PS-II MOUSE

- PS-II MOUSE CONNECTOR / CABEL
- CABLE OPTIONAL

### POWER CONNECTOR

- ATX POWER CONNECTOR

### DIMM

- 2 x DIMM 168-PIN
- 3.3V SDRAM, EDO

### ON BOARD I/O FUNCTION

- IDE : SUPPORT DUAL PIO & BUS MASTER IDE
- MODE-4 PIO
- ULTRA DMA (33MB/SEC)
- ENHANCED IDE HDDs x 4 OR IDE CD-ROM
- FDC : 2 X 360K / 720K / 1.2M / 1.44M / 2.88MB
- 2S : 2 x 16C550 UARTs
- 1P : 1 x SPP / EPP / ECP

### SIMM


- 2 x SIMM, FP, EDO, BURST EDO

### ON BOARD SRAM

- 512K/1M (64K x 64 2PC)

### CPU

- INTEL P54C / P55C
- AMD K5 / K6 / K6-3D
- CYRIX M2 / MX
- IBM / SGS M1 / MX



WIN WITH ITE



CHIP AWAY VIRUS  
**PC-cillin**




# 6BX2

5MVP3 MAIN BOARD / 6BX2 MAIN BOARD

## 6BX2 MAIN BOARD

<p><b>II/O CHIP</b></p> <ul style="list-style-type: none"> <li>• ITE OR WINBOND</li> </ul> <p><b>AUDIO</b></p> <ul style="list-style-type: none"> <li>• PCI ESS SOLO-1 SOUND</li> </ul> <p><b>BIOS</b></p> <ul style="list-style-type: none"> <li>• AWARD</li> </ul> <p><b>SLOT</b></p> <ul style="list-style-type: none"> <li>• 2 x ISA, 3 x PCI</li> </ul> <p><b>AGP</b></p> <ul style="list-style-type: none"> <li>• AGP PORT</li> </ul> <p><b>CHIPSET</b></p> <ul style="list-style-type: none"> <li>• i440 BX</li> <li>• BGA</li> </ul> <p><b>SB-LINK</b></p> <ul style="list-style-type: none"> <li>• CREATIVE «SB-LINK» HEADER</li> </ul> <p><b>THERMISTOR</b></p> <ul style="list-style-type: none"> <li>• CPU TEMPERATURE SENSOR</li> <li>• JUMPER-FREE</li> </ul> <p><b>BOARD SIZE</b></p> <ul style="list-style-type: none"> <li>• 22CM x 22CM</li> </ul>	<p><b>PS-II MOUSE</b></p> <ul style="list-style-type: none"> <li>• PS-II MOUSE, K/B CABLE</li> </ul> <p><b>USB</b></p> <ul style="list-style-type: none"> <li>• USB CONNECTOR OPTIONAL</li> </ul> <p><b>POWER CONNECTOR</b></p> <ul style="list-style-type: none"> <li>• AT/ATX POWER CONNECTOR</li> </ul> <p><b>DIMM</b></p> <ul style="list-style-type: none"> <li>• 3 x DIMM 168-PIN</li> <li>• 3.3V SDRAM</li> </ul> <p><b>CPU</b></p> <ul style="list-style-type: none"> <li>• SLOT1, 100MHZ</li> <li>• 350MHZ P-II CPU UP TO 450MHZ OR HIGHER SPEED (DESCHUTES)</li> <li>• KLAMATH &amp; CELERON TOO</li> </ul> <p><b>ON BOARD I/O FUNCTION</b></p> <ul style="list-style-type: none"> <li>• IDE : SUPPORT DUAL PIO &amp; BUS MASTER IDE</li> <li>• MODE-4 PIO</li> <li>• ULTRA DMA (33MB/SEC)</li> <li>• ENHANCED IDE HDDs x 4 OR IDE CD-ROM</li> <li>• FDC : 2 X 360K / 720K / 1.2M / 1.44M / 2.88MB</li> <li>• 2S : 2 x 16C550 UARTs</li> <li>• 1P : 1 x SPP / EPP / ECP</li> </ul>
--	--



WIN WITH ITE



CHIP AWAY VIRUS  
**PC-cillin**

# 6LX2



## 6LX2 MAIN BOARD

### BIOS

- AWARD

### SLOT

- 2 x ISA & 3 x PCI

### AGP

- AGP PORT

### CHIPSET

- i440 LX
- BGA


### SB-LINK

- CREATIVE «SB-LINK» SUPPORTED

- JUMPER-FREE

### BOARD SIZE

- 22 CM x 22 CM

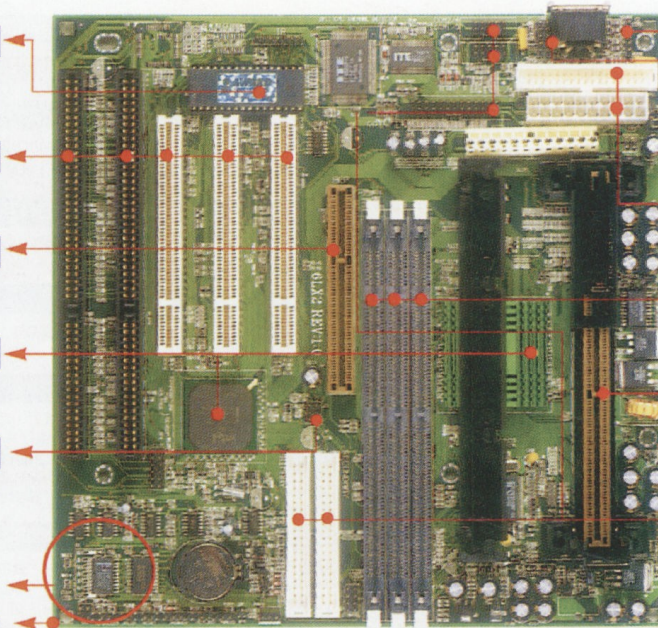

### PS-II MOUSE

- PS-II MOUSE , K / B CABLE

### USB

- USB CONNECTOR OPTIONAL

### POWER CONNECTOR

- AT / ATX POWER CONNECTOR

### DIMM


- 3 x DIMM 168-PIN
- 3.3V SDRAM

### CPU

- SLOT1 P-II CPU UP TO 333MHZ OR HIGHER SPEED
- FOR KLAMATH, CELERON OR MENDOCINO CPUS

### ON BOARD I/O FUNCTION

- IDE : SUPPORT DUAL PIO & BUS MASTER IDE
- MODE-4 PIO
- ULTRA DMA (33MB/SEC)
- ENHANCED IDE HDDs x 4 OR IDE CD-ROM
- FDC : 2 X 360K / 720K / 1.2M / 1.44M / 2.88MB
- 2S : 2 x 16C550 UARTs
- 1P : 1 x SPP / EPP / ECP



WIN WITH ITE




CHIP AWAY VIRUS  
**PC-cillin**



# 6ALX2

## 6ALX2 P II ATX MAIN BOARD

6ALX2 MAIN BOARD / 6ALX2 MAIN BOARD

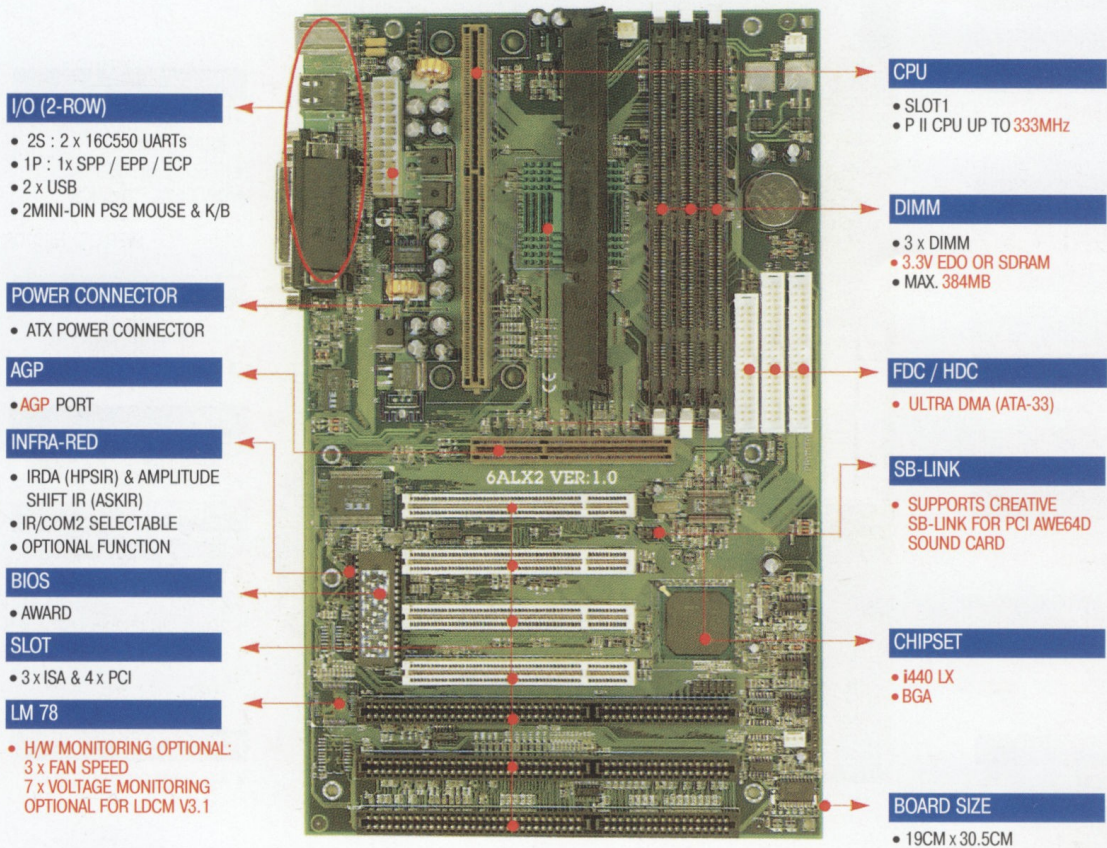

WIN WITH ITE




CHIP AWAY VIRUS  
**PC-cillin**

# 5AMVP3



## 5AMVP3 AGP ATX MAIN BOARD

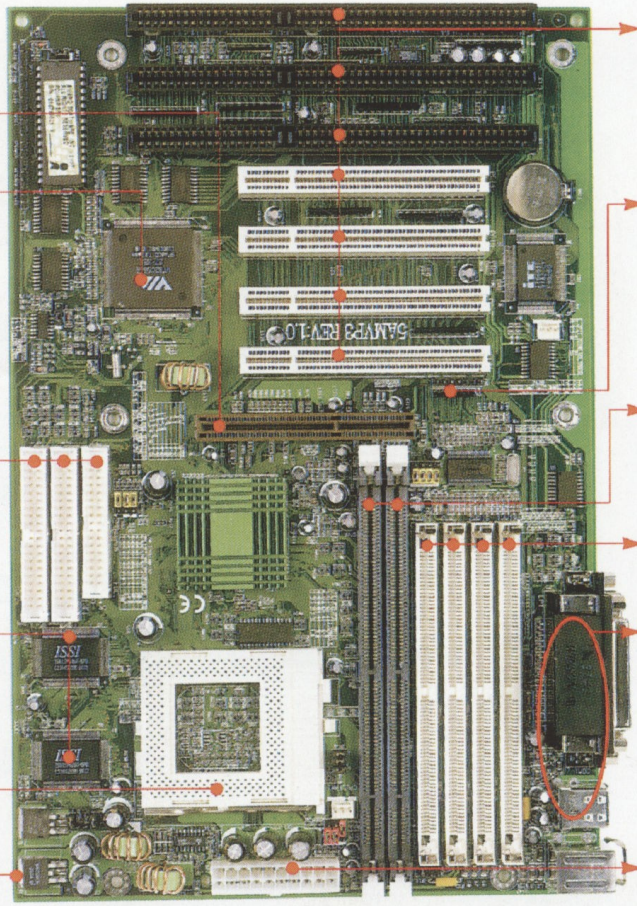

### AGP

- AGP PORT

### CHIPSET

- VIA MVP3 CHIPSET
- 100MHZ
- AGP

### FDC / HDC

- ULTRA DMA (ATA-33)

### SRAM

- 512K (64K x 64 1pc)
- 1MB (64K x 64 2pcs)

### CPU

- INTEL P54C / P55C
- AMD K5 / K6 / <6-2 UP TO 100MHz
- CYRIX M1 / MX UP TO 100MHz
- IBM / SGS M1 / MX UP TO 100MHz
- AMD K6-300 3.45V V<sub>I/O</sub>
- SPECIALLY FOR K6-2 / 333 (95 MHz)

### BOARD SIZE

- 20CM x 30.5CM

### EXP. SLOT

- 3 x ISA, 4 x PCI

### INFRA-RED

- IRDA (HPSIR) & AMPLITUDE SHIFT IR (ASKIR)
- IR/COM2 SELECTABLE
- OPTIONAL FUNCTION

### DIMM

- 2 x DIMM 168-PIN
- 3.3V EDO OR SDRAM

### SIMM


- 4 x 72-PIN, MAX. 128MB
- FP, EDO, BURST EDO

### I/O (2-ROW)

- 2S : 2 x 16C550 UARTs
- 1P : 1x SPP / EPP / ECP
- 2 x USB
- 2MINI-DIN PS2 MOUSE & K/B

### POWER CONNECTOR

- ATX POWER CONNECTOR



WIN WITH ITE





CHIP AWAY VIRUS  
**PC-cillin**



# 6ABX2V

## 6ABX2V MAIN BOARD

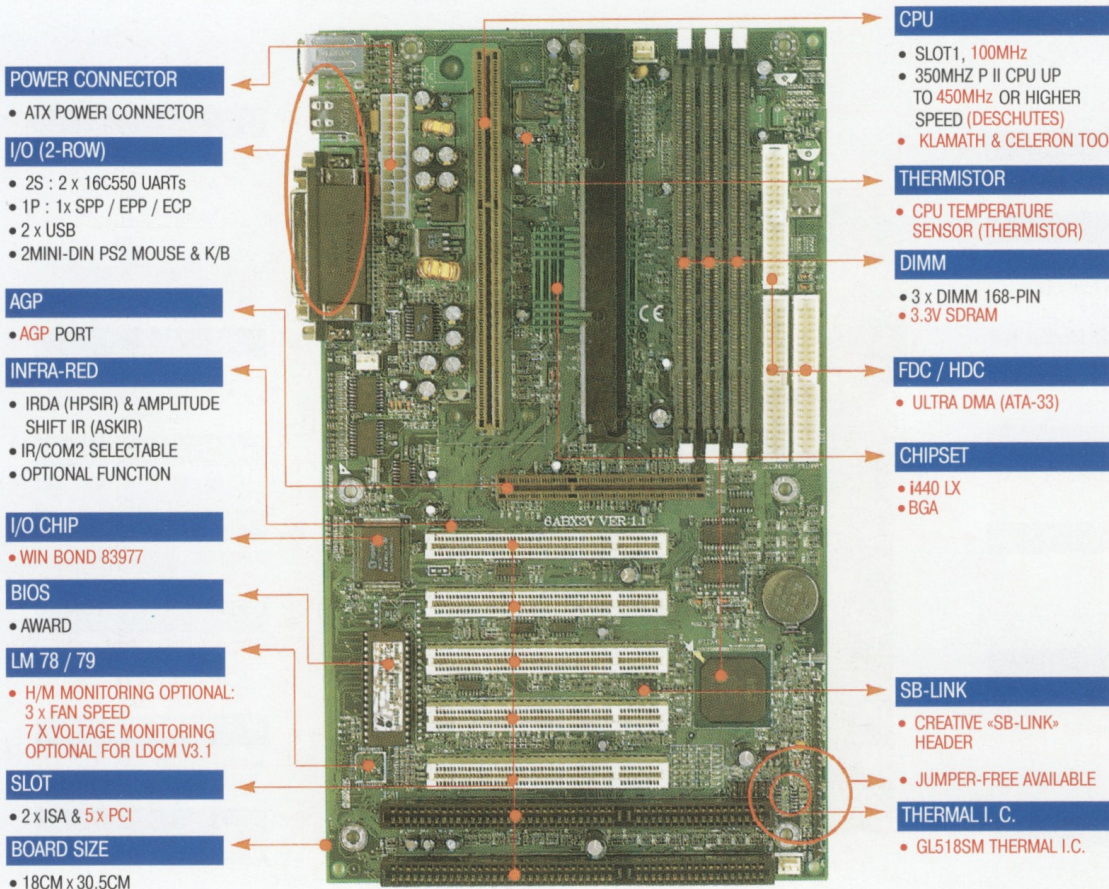

WIN WITH ITE





CHIP AWAY VIRUS  
**PC-cillin**

5AMVP3 AGP ATX MAIN BOARD / 6ABX2V MAIN BOARD

# P6BDX



## P6BDX MAIN BOARD FOR DUAL PENTIUM II PROCESSOR

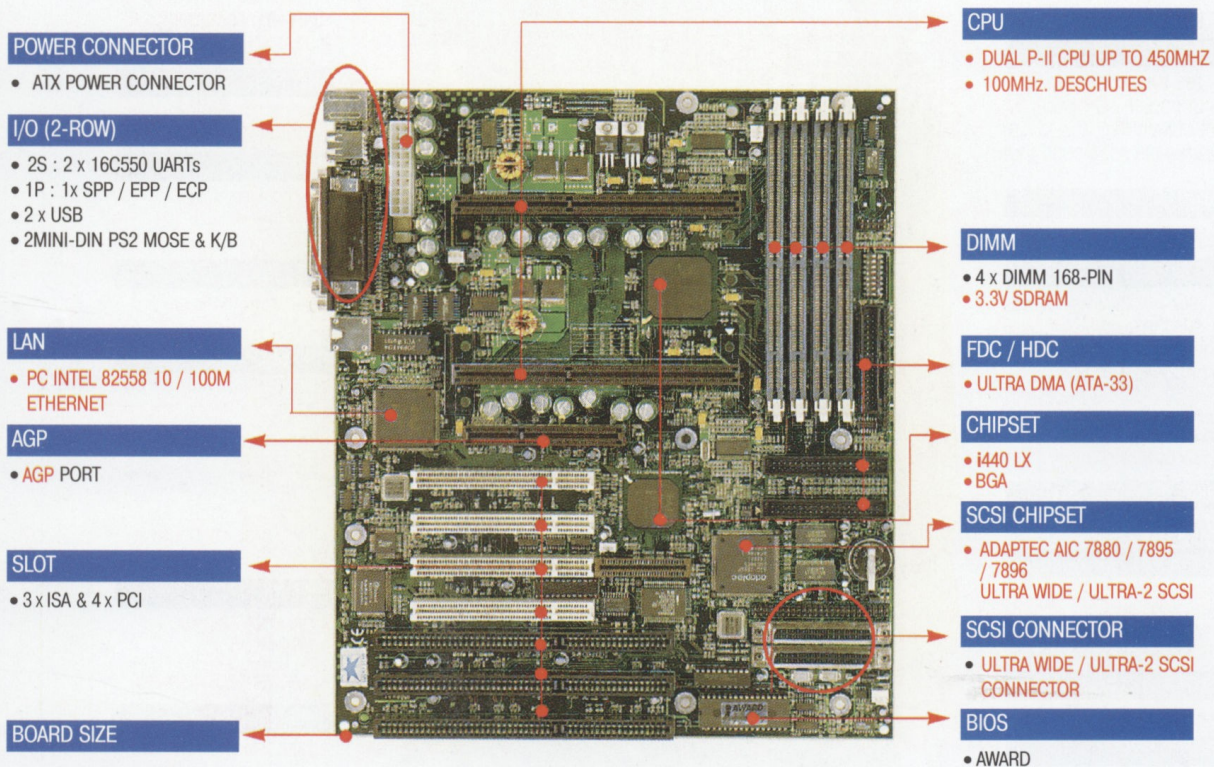

WIN WITH ITE



CHIP AWAY VIRUS  
**PC-cillin**



# P6LDX

## P6LDX MAIN BOARD FOR DUAL PENTIUM-II PROCESSOR

### I/O (2-ROW)

- 2S : 2 x 16C550 UARTs
- 1P : 1x SPP / EPP / ECP
- 2 x USB
- 2MINI-DIN PS2 MOSE & K/B

### POWER CONNECTOR

- ATX POWER CONNECTOR

### AGP

- AGP PORT

### SLOT


- 3 x ISA & 4 x PCI

### BOARD SIZE

- 24.5 CM x 30.5 CM

### SCSI RAID

- ADAPTEC ARO-1130  
EXTENSION SLOT

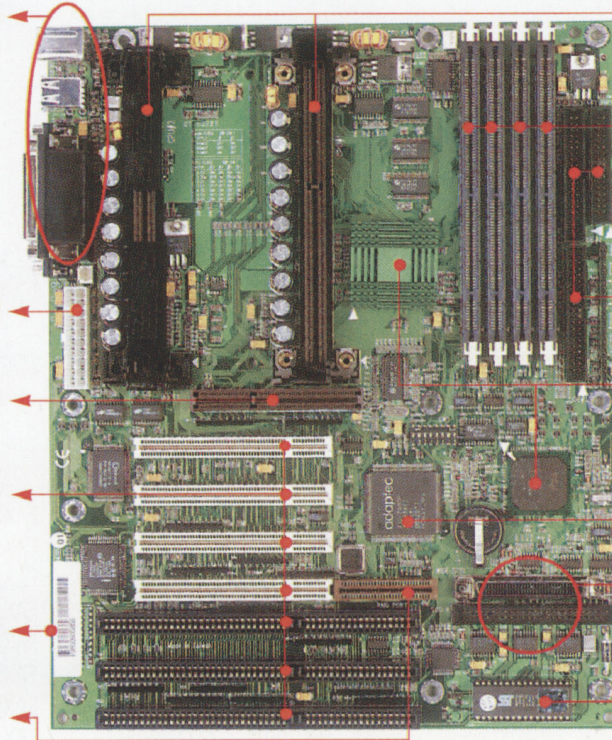

### CPU

- DUAL P-II CPU UP TO 333MHZ

### DIMM

- 4 x DIMM 168-PIN
- 3.3V SDRAM

### FDC / HDC

- ULTRA DMA (ATA-33)

### CHIPSET

- i440 LX
- BGA

### SCSI CHIPSET

- ADAPTEC AIC 7880  
FAST / WIDE / ULTRA WIDE  
SCSI

### SCSI CONNECTOR


- FAST / WIDE / ULTRA WIDE  
SCSI CONNECTOR

### BIOS

- AWARD

### BOARD SIZE

- 24.5 CM x 30.5 CM



WIN WITH ITE



CHIP AWAY VIRUS  
**PC-cillin**



MANUFACTURER & EXPORTER

**LUCKY STAR TECHNOLOGY CO., LTD.**

NO. 1-6, WU-CHUAN 1 ROAD, HSIN-CHUANG CITY,  
TAIPEI SHIENG, TAIWAN, R. O. C.

TEL: 886-2-2299-0222 (REP.)

FAX: 886-2-2299-0112, 2299-2045

E-MAIL: [lucky@c2.hinet.net](mailto:lucky@c2.hinet.net), [sales@lucky-star.com.tw](mailto:sales@lucky-star.com.tw)

WEB-SITE: <http://www.lucky-star.com.tw>

**LUCKY STAR**

AUSTRIA	TEL: (43)-1-8654340	FAX: (43)-1-8654340-40
BELGIUM	TEL: (32)-89-418887	FAX: (32)-89-492999
CANADA	TEL: (1)-905-9402889	FAX: (1)-905-4740954
FINLAND	TEL: (358)-92424055	FAX: (358)-92940210
FRANCE	TEL: (33)-1-45100700	FAX: (33)-1-43861630
GERMANY	TEL: (49)-241-911035	FAX: (49)-241-911920
ITALY	TEL: (39)-587-2882	FAX: (39)-587-288486
KOREA	TEL: (82)-2-3271-7800	FAX: (82)-2-3271-7821
POLAND	TEL: (48)-22-366220	FAX: (48)-22-366229
RUSSIA	TEL: (7)-095-2342165	FAX: (7)-095-2736549
SWITZERLAND	TEL: (41)-1-811-3300	FAX: (41)-1-811-3200
U.K.	TEL: (44)-1-952-428947	FAX: (44)-1-952-428892
USA	TEL: (1)-408-733-8777	FAX: (1)-408-733-4397
	TEL: (1)-714-994-0638	FAX: (1)-714-994-5621
VIETNAM	TEL: (84)-88-657-374	FAX: (84)-88-657-374

ALL BRAND NAMES ARE REGISTERED TRADEMARKS OF RESPECTIVE OWNERS